


Company Address	James Walker, John Escritt Rd., Bingley BD16 2BS, United Kingdom	According to DIN EN 13555 2014-07
Gasket Type	Metakamm LGCK	
Sealing element dimensions [mm]	69 x 53 x 5	

L [mg/(s*m)]	Q _{min,L} [MPa]	Minimum stress to seal Q _{min,L} (at assembly), Q _{Smin,L} (after off-loading) for p = 40 bar									
		Q _{Smin,L} [MPa]									
		Q _A = 10 MPa	Q _A = 20 MPa	Q _A = 40 MPa	Q _A = 60 MPa	Q _A = 80 MPa	Q _A = 100 MPa				
10 ⁰	5	5	5	5	5	5	5				
10 ⁻¹	5	5	5	5	5	5	5				
10 ⁻²	15		8	6	8	8	8				
10 ⁻³	26			21	12	11	10				
10 ⁻⁴	43				30	20	17				
10 ⁻⁵	60				59	37	31				
10 ⁻⁶	87						79				
10 ⁻⁷											
10 ⁻⁸											



Note: the content of darkened cells was not determined respectively is unnecessary Rev - No: 1 Creation date of this sheet: 2015-04-30

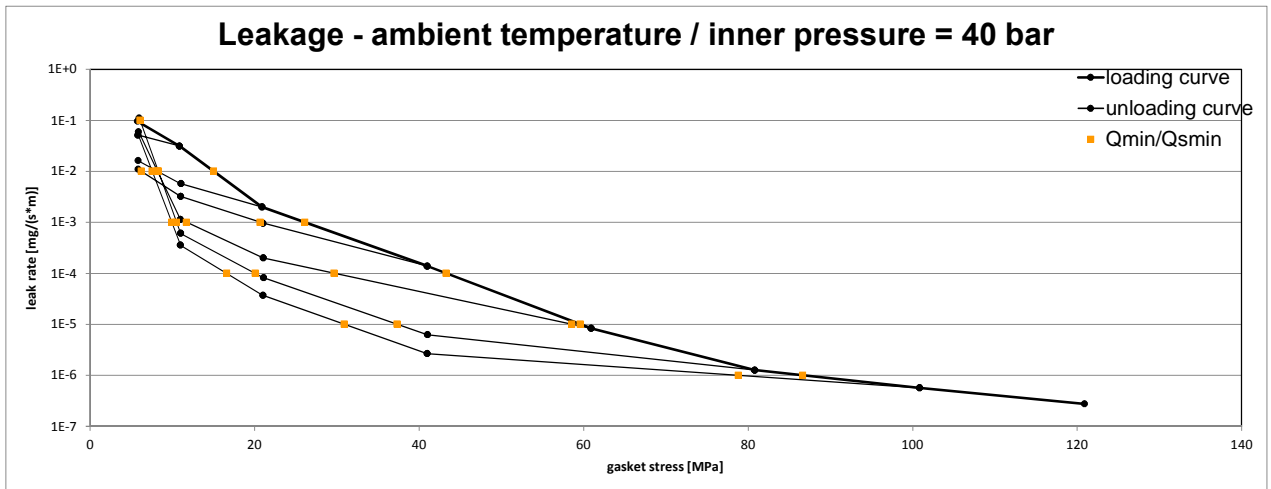