


Company Address	Teadit International Produktions GmbH, Rosenheimerstraße 10, 6330 Kufstein, Austria
Gasket Type	24 SH
Sealing element dimensions [mm]	92 x 49 x 3

L [mg/(s*m)]	Q _{min/L} [MPa]	Minimum stress to seal Q _{min/L} (at assembly), Q _{Smin/L} (after off-loading) for p = 10 bar									
		Q _{Smin/L} [MPa]									
		Q _A = 15 MPa	Q _A = 20 MPa	Q _A = 30 MPa	Q _A = 40 MPa	Q _A = 60 MPa	Q _A = 80 MPa	Q _A = 100 MPa			
10 ⁰	10	5	5	5	5	5	5	5			
10 ⁻¹	13	5	5	5	5	5	5	5			
10 ⁻²	23			5	5	5	5	5			
10 ⁻³	31				5	5	5	5			
10 ⁻⁴	36				6	5	6	8			
10 ⁻⁵	48					10	10	14			
10 ⁻⁶											
10 ⁻⁷											
10 ⁻⁸											



L [mg/(s*m)]	Q _{min/L} [MPa]	Minimum stress to seal Q _{min/L} (at assembly), Q _{Smin/L} (after off-loading) for p = 40 bar									
		Q _{Smin/L} [MPa]									
		Q _A = 20 MPa	Q _A = 40 MPa	Q _A = 60 MPa	Q _A = 80 MPa	Q _A = 100 MPa	Q _A = 120 MPa	Q _A = 140 MPa	Q _A = 160 MPa		
10 ⁰	12	10	10	10	10	10			10		
10 ⁻¹	20	20	10	10	10	10			10		
10 ⁻²	27		10	10	10	10			10		
10 ⁻³	34		10	10	10	10			10		
10 ⁻⁴	44			10	10	10			15		
10 ⁻⁵	66				30	19			26		
10 ⁻⁶	157								159		
10 ⁻⁷											
10 ⁻⁸											

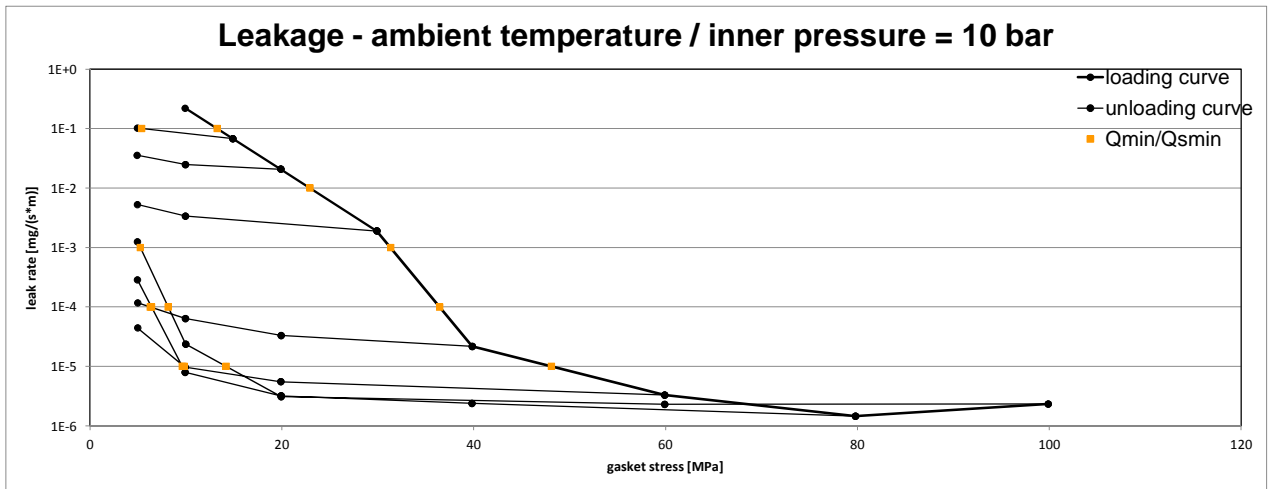